

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10



CIRRUS  
SYSTEMS, INC.

HEADQUARTERS  
200 WEST RD,  
PORTSMOUTH,  
NH 03801  
Phone: 877-636-2331

KEY PLAN

OWNER:

XXX  
XXX  
XXX  
XXX

PROJECT #: XXXXX DATE: 05/20/2020  
DRAWN BY: P.J.C. APPROVED BY: XX  
SCALE: AS SHOWN REVISION: 0.0  
PAGE # AND NAME: V34.0 - 4ft x 8ft SINGLE SCREEN DETAILS

REVISION


DATE # PAGE COMMENT  
05/20/20 1 INITIAL DRAFT

ALL SCREEN WIRING SHOULD BE  
CONFIRMED AND PERFORMED BY  
A LOCALLY LICENSED ELECTRICIAN  
IN ACCORDANCE WITH THE  
CIRRUS SYSTEMS INCORPORATED  
INSTALLATION MANUAL FOR THIS  
PRODUCT. SITE CONDITIONS MAY  
VARY. IMPROPER WIRING CAN  
RESULT IN ELECTRICAL SHOCK  
AND DEATH.

001

DISPLAY

8FT

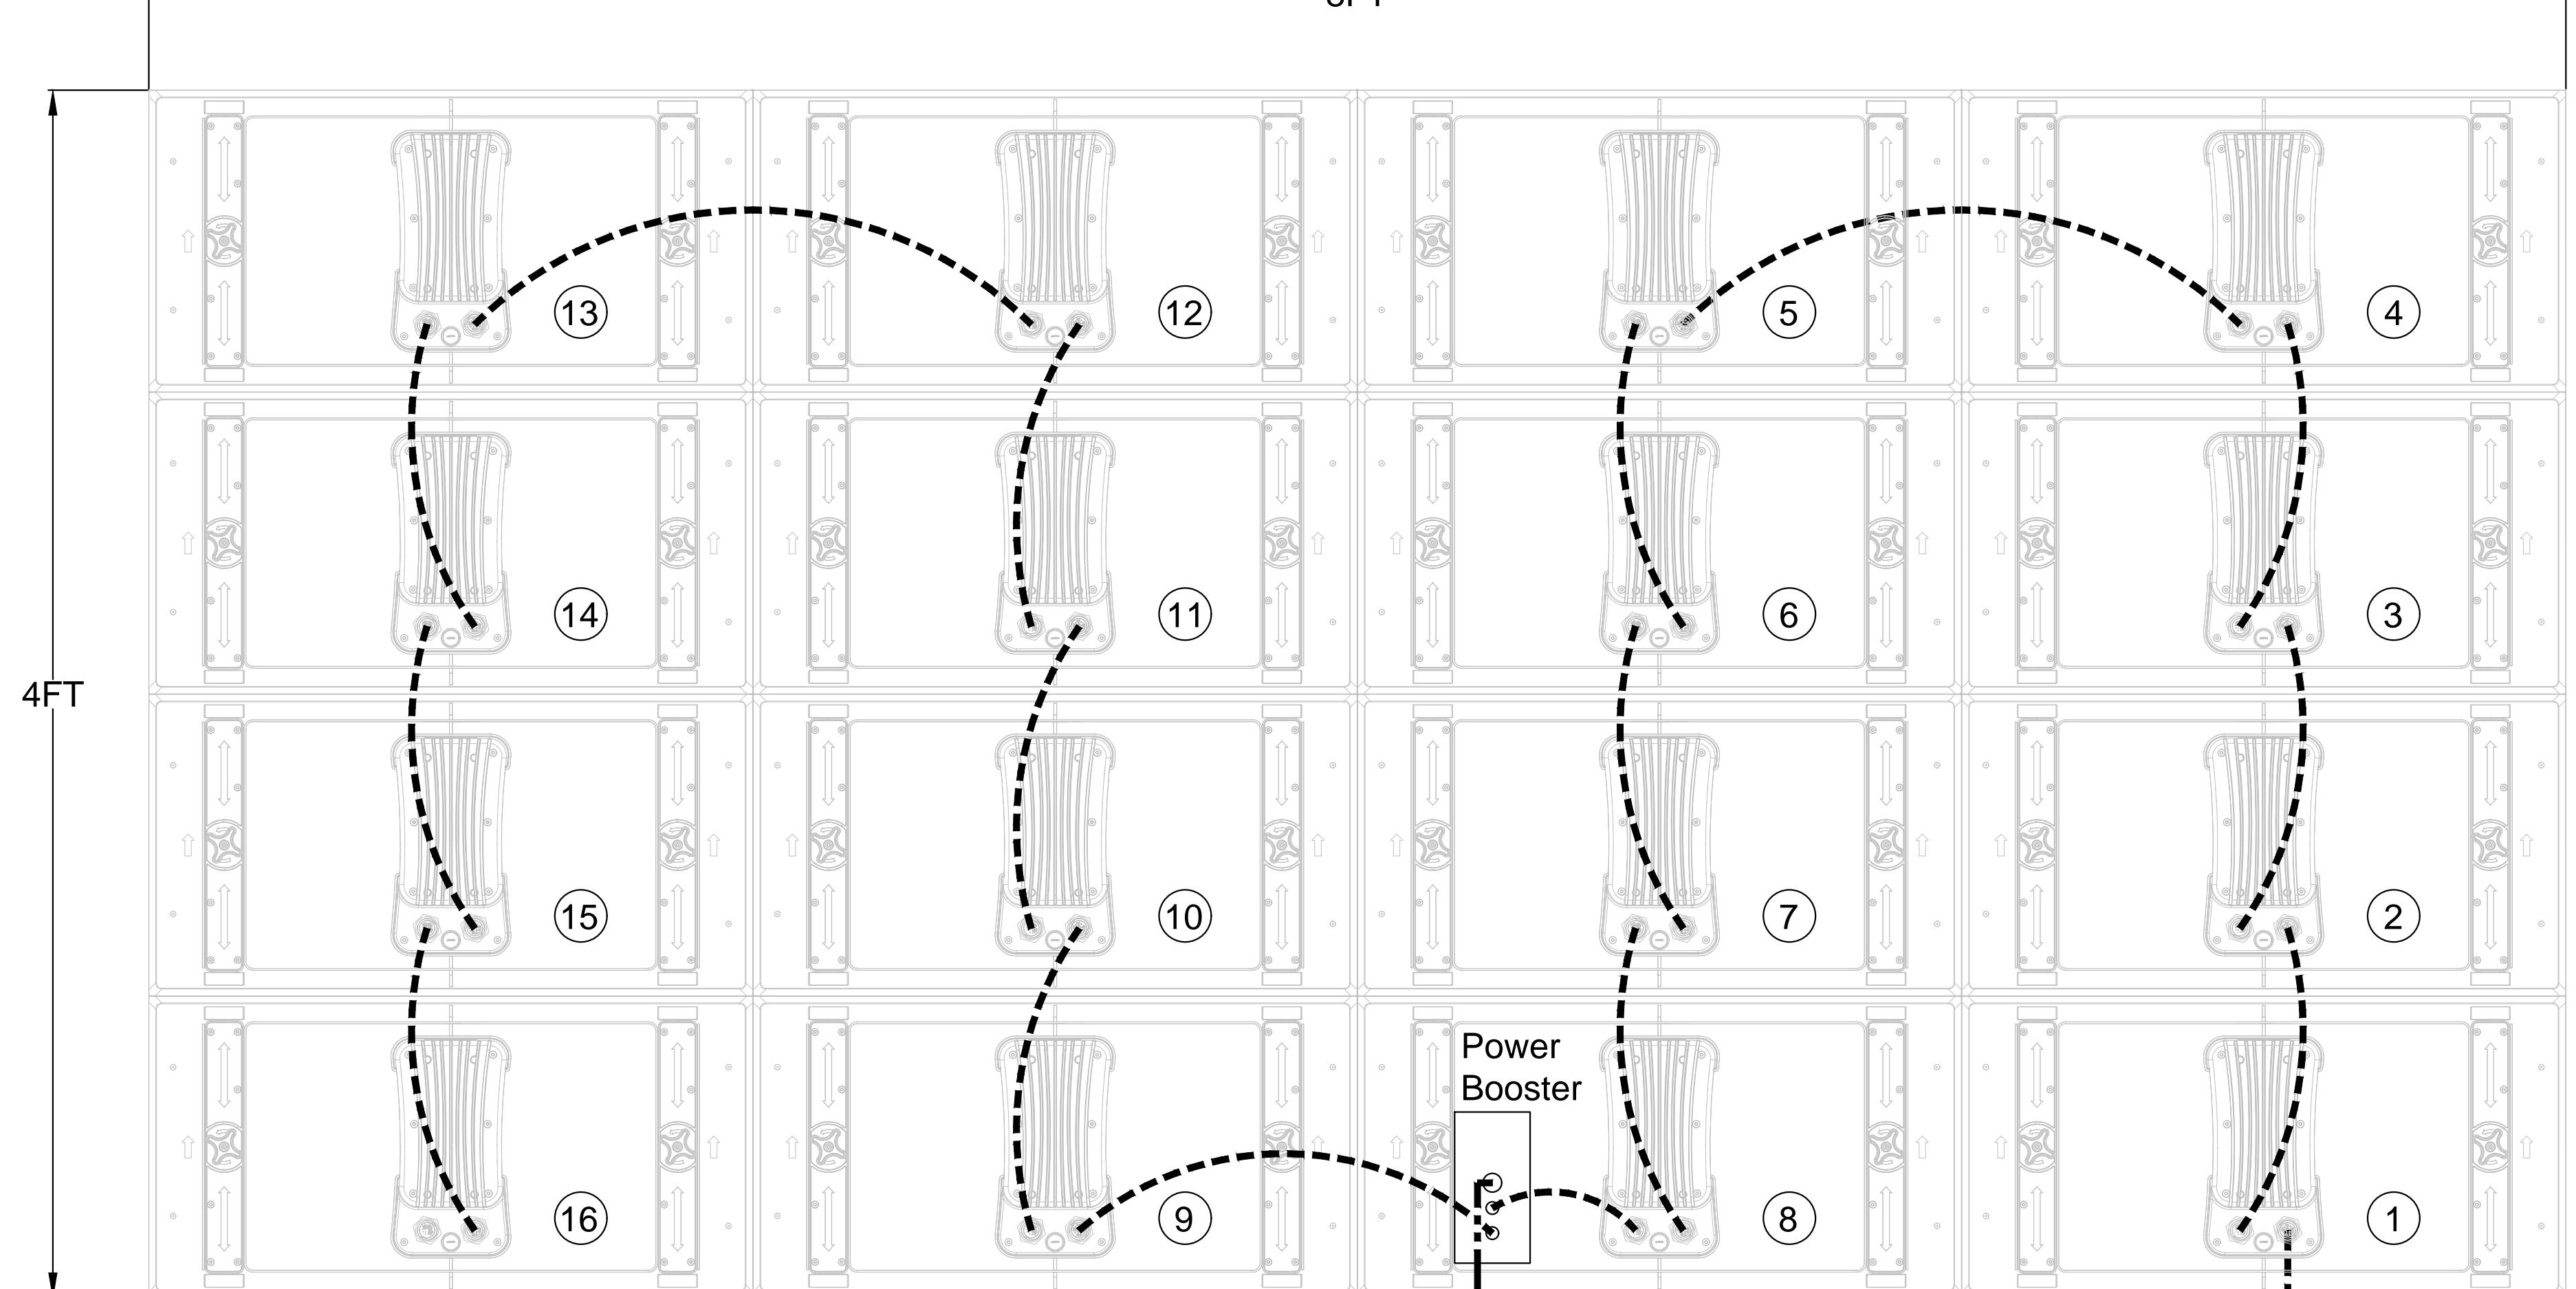

40 Amp Circuit  
Breaker at Building

208V Circuit

Sub-Panel at  
the sign to step  
down to 20 Amp  
breaker and  
line output

Power ————— Controller

2' Module Cable  
(Standard)

Module cable  
connection

10' Extension Cable  
(Optional)

1 4ft x 8ft SINGLE SCREEN  
NO SCALE

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10